



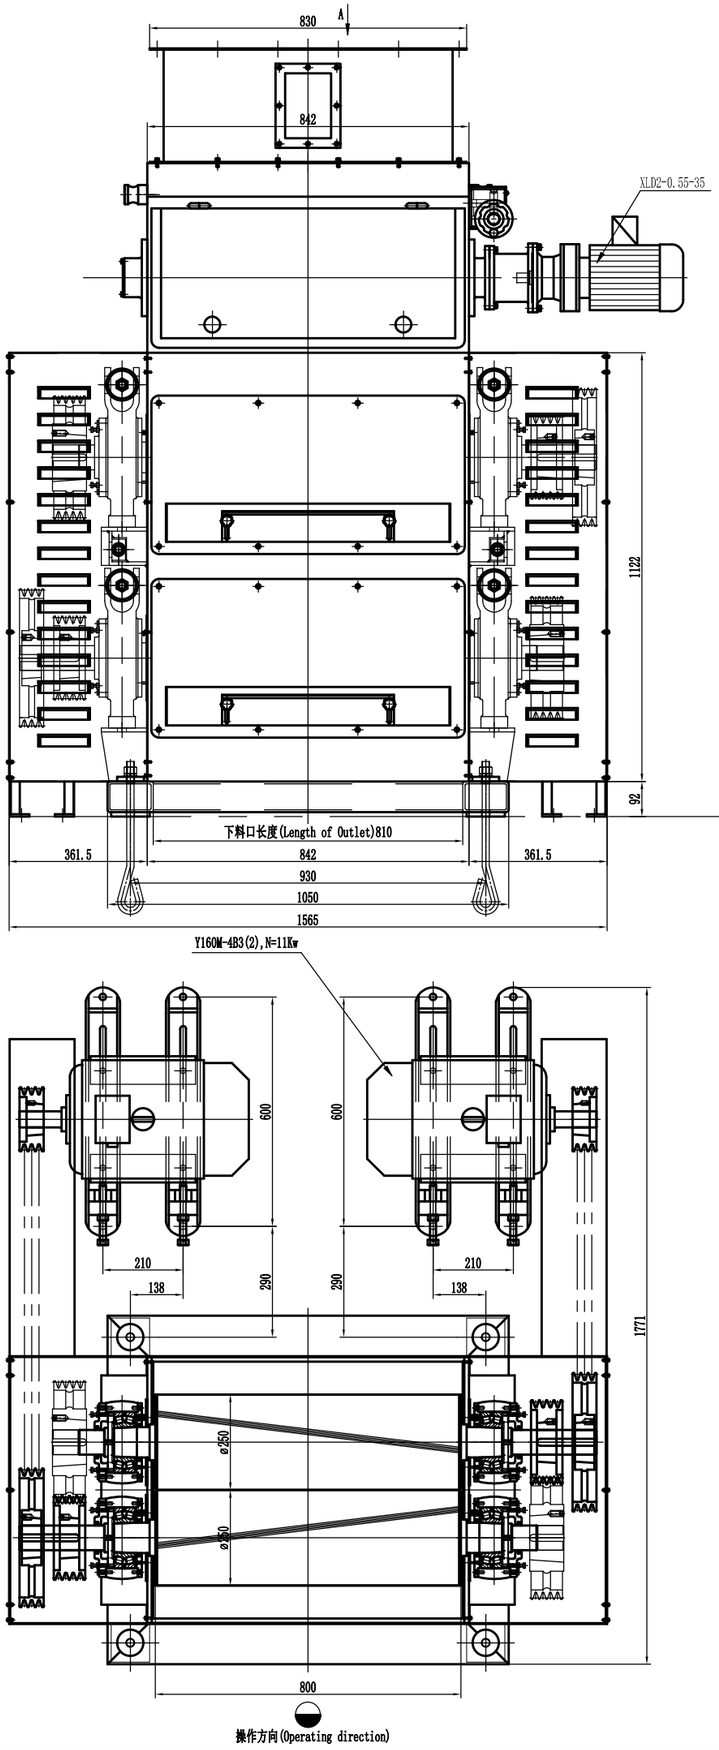


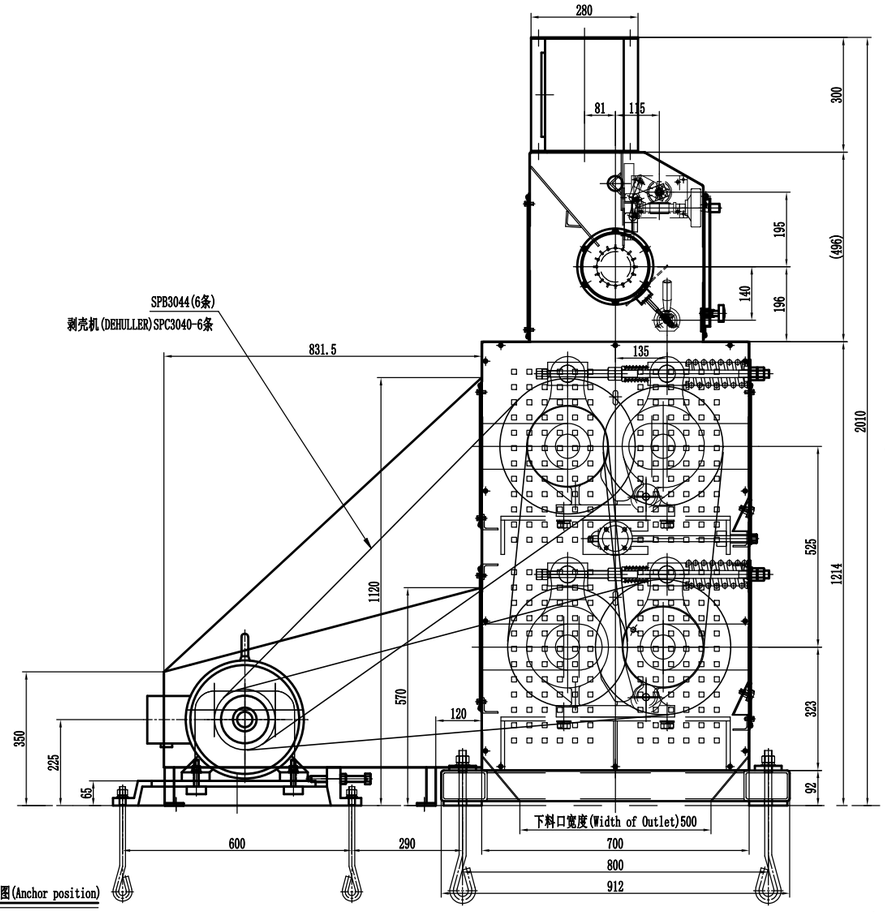

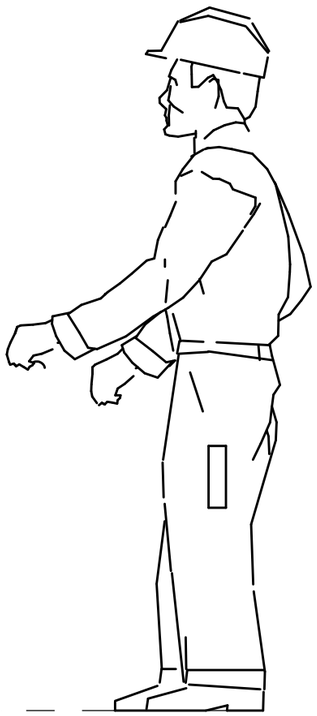

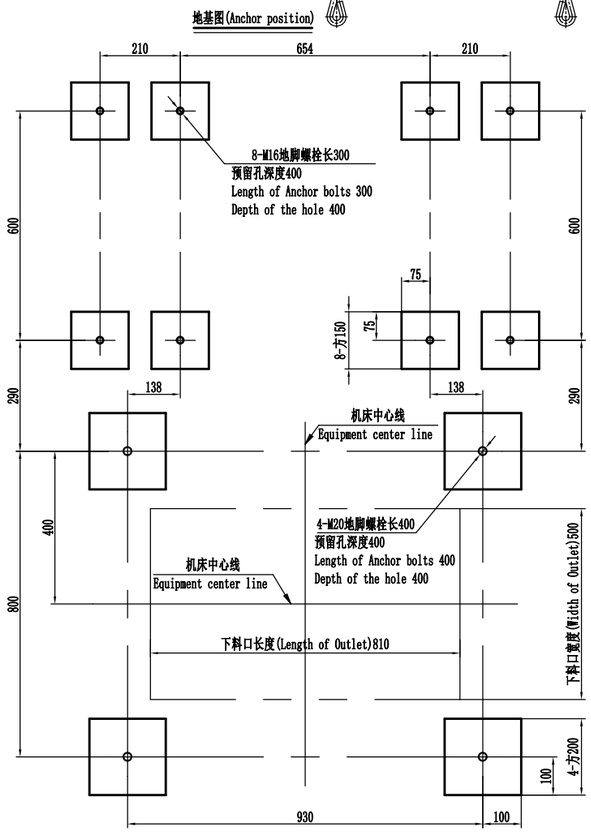

A 向

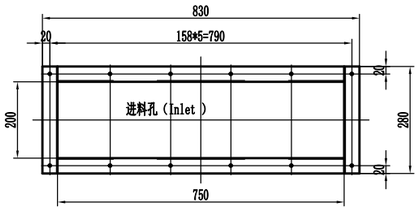

注：Note:

1、基础的深度依地质的情况而定，建议超过地冻层；

1、The depth of the foundation shall be determined according to geological conditions, but must exceed the frozen soil layer.

2、电器预埋件，用户根据现场决定。

2、Electrical embedded parts shall be determined by the User according to the site conditions.

3、电机安装方式有多种，用户可根据现场决定；电机位置最好按三角带实际长度决定。

3、There are multiple motor mounting methods, and the User may decide according to on-site conditions.The motor position is preferably determined according to the actual length of the V-belt.

4、设备静载荷为25kN，设备动载荷为50kN。

4、The static load of the equipment is 25KN and the dynamic load is 50KN

图四
Drawing 4

								总图名称	YPSG250x800 双对辊破碎、剥壳机
标记	处数	分区	更改文件号	签字	年、月、日				
设计	孙成田		标准化					图样标记	数量 / 重量 / 比例
								A1	1 /	1:8
审核								材质	组件
工艺			批准					共 张 第 张	

大连市高昌机器制造有限公司	
名称	外形及地脚位置图
图号	YPSG2580-00000